

# 数值传热学

## 第五章 对流扩散方程的离散格式(1)



主讲 陶文铨

西安交通大学能源与动力工程学院  
热流科学与工程教育部重点实验室  
2016年10月19日, 西安

# Numerical Heat Transfer

## (数值传热学)

### Chapter 5 Discretized Schemes of Diffusion and Convection Equation (1)



**Instructor Tao, Wen-Quan**

**CFD-NHT-EHT Center**

**Key Laboratory of Thermo-Fluid Science & Engineering**

**Xi'an Jiaotong University**

**Xi'an, 2016-Oct-18**

# Chapter 5 Discretized diffusion – convection equation

**5.1 Two ways of discretizing convection term**

**5.2 CD and FUD of the convection term**

**5.3 Hybrid and power-law schemes**

**5.4 Characteristics of five three-point schemes**

**5.5 Discussion on false diffusion**

**5.6 Methods for overcoming or alleviating effects of false diffusion**

**5.7 Stability analysis of discretized diffusion-convection equation**

**5.8 Discretization of multi-dimensional problem and B.C. treatment**

## **5.1 Two ways of discretizing convection term**

### **5.1.1 Importance of discretization scheme**

**1. Accuracy**

**2. Stability**

**3. Economics**

### **5.1.2 Two ways for constructing discretization schemes of convective term**

### **5.1.3 Relationship between the two ways**

## 5.1 Two ways of discretizing convection term

### 5.1.1 Importance of discretization(离散) scheme

Mathematically convective term is only a 1<sup>st</sup> order derivative, while its physical meaning ( strong directional) makes its discretization one of the hot spots of numerical simulation :

1. It affects the numerical accuracy(精确性).

Scheme with 1<sup>st</sup>-order TE involves severe numerical error.

2. It affects the numerical stability(稳定性).

The schemes of CD, TUD and QUICK are only conditionally stable.


3. It affects numerical economics (经济性).

## 5.1.2 Two ways for constructing (构建) schemes

### 1. Taylor expansion – providing the FD form at a point

Taking CD as an example:

$$\left(\frac{\partial \phi}{\partial x}\right)_P = \frac{\phi_E - \phi_W}{2\Delta x} = \frac{\phi_{i+1} - \phi_{i-1}}{2\Delta x}$$

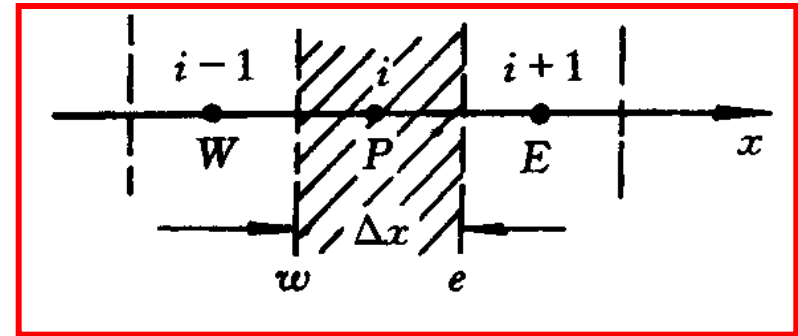

### 2. CV integration – providing interpolation (插值) for the interface variable

$$\frac{1}{\Delta x} \int_w^e \frac{\partial \phi}{\partial x} dx = \frac{\phi_e - \phi_w}{\Delta x}$$

Piecewise linear

Uniform grids

$$= \frac{(\phi_E + \phi_P)/2 - (\phi_P + \phi_W)/2}{\Delta x} = \frac{\phi_E - \phi_W}{2\Delta x}$$

## 5.1.3 Relationship between the two ways

1. For the same scheme they have the same T.E.
2. For the same scheme, the coefficients of the 1<sup>st</sup> term in T.E. are different
3. Taylor expansion provides the FD form at a point while CV integration gives the mean value of integration average (积分均值) within the domain

$$\frac{1}{\Delta x} \int_w^e \frac{\partial \phi}{\partial x} dx = \frac{\phi_e - \phi_w}{\Delta x}$$

## 5.2 CD and FUD of the convection term

### 5.2.1 Analytical solution of 1-D model equation

### 5.2.2 CD discretization of 1-D diffusion-convection equation

### 5.2.3 Up wind scheme of convection term

#### 1. Definition of CV integration

#### 2. Compact form

#### 3. Discretization equation with FUD of convection and CD of diffusion

## 5.2 CD and FUD of convection term

### 5.2.1 Analytical solution of 1-D diffusion and convection equation

$$\left\{ \frac{d(\rho u \phi)}{dx} = \frac{d}{dx} \left( \Gamma \frac{d\phi}{dx} \right), \right.$$


Physical properties  
and velocity are  
known constants

$$\left. x = 0, \phi = \phi_0; \quad x = L, \phi = \phi_L \right\}$$

The analytical solution of this ordinary DFE:

$$\frac{\phi - \phi_0}{\phi_L - \phi_0} = \frac{\exp(\rho u x / \Gamma) - 1}{\exp(\rho u L / \Gamma) - 1} = \frac{\exp\left(\frac{\rho u L}{\Gamma} \frac{x}{L}\right) - 1}{\exp(\rho u L / \Gamma) - 1} = \frac{\exp(Pe \frac{x}{L}) - 1}{\exp(Pe) - 1}$$

# Solution Analysis

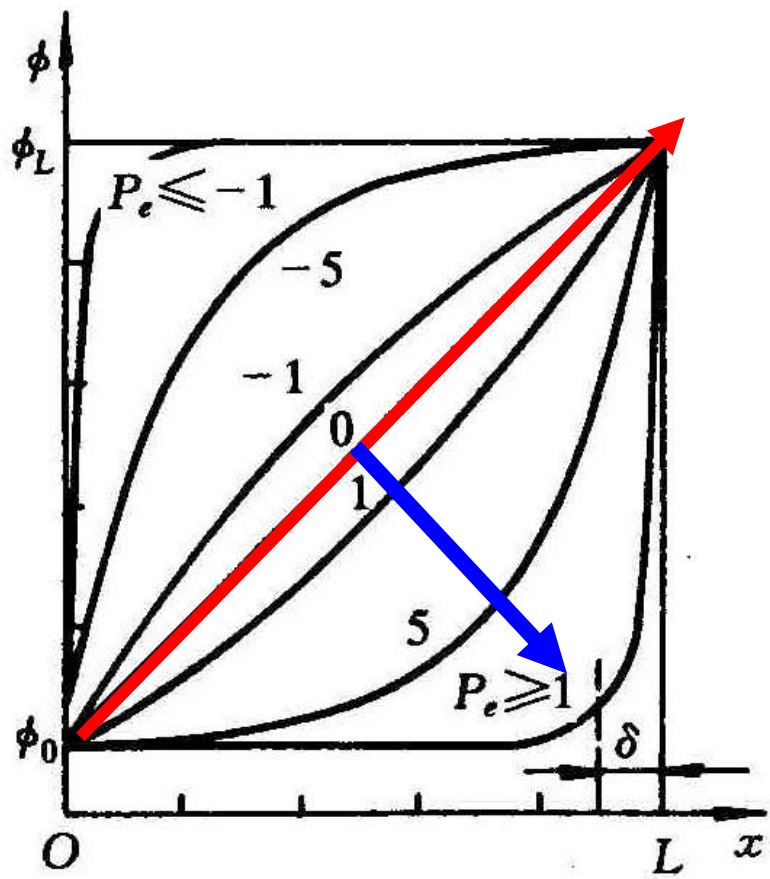

**Pe=0**, pure diffusion, linear distribution

With increasing **Pe**, distribution curve becomes more and more convex downward (下凸);

When **Pe=10**, in the most region from  $x=0-L$

$$\phi = \phi_0$$

Only when  $x$  is close to  $L$ ,  $\phi$  increases dramatically (显著的) and when  $x=L$ ,

$$\phi = \phi_L$$

The above variation trend with Peclet number is consistent(**协调的**) with the physical meaning of **Pe**

$$Pe = \frac{\rho u L}{\Gamma} = \frac{\rho u}{\Gamma / L}$$

Convection

Diffusion

**When Pe is small – Diffusion dominated(占优), linear distribution ;**

**When Pe is large – Convection dominated, i.e., upwind effect is dominated, upwind information is transported downstream, and when  $Pe \geq 100$ , streamwise (**流向**) conduction can be neglected.**

It is required in some sense that the discretized scheme of the convective term has some similar physical characteristics.

## 5.2.2 CD discretization of 1-D diffusion-convection equation


### 1. Integration of 1-d model equation

Adopting the linear profile, integration over a CV yields:

$$\underbrace{\phi_P \left[ \frac{1}{2}(\rho u)_e + \frac{\Gamma_e}{(\delta x)_e} - \frac{1}{2}(\rho u)_w + \frac{\Gamma_w}{(\delta x)_w} \right]}_{a_P} = \underbrace{\phi_E \left[ \frac{\Gamma_e}{(\delta x)_e} - \frac{1}{2}(\rho u)_e \right]}_{a_E} + \underbrace{\phi_W \left[ \frac{\Gamma_w}{(\delta x)_w} + \frac{1}{2}(\rho u)_w \right]}_{a_W}$$

Thus:

$$a_P \phi_P = a_E \phi_E + a_W \phi_W$$

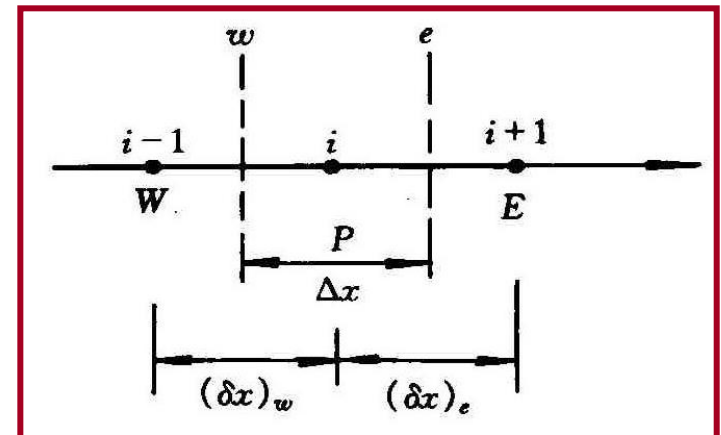

## 2. Relationship between coefficients

Rewriting  $a_P$  as follows:

$$a_P = \frac{1}{2}(\rho u)_e + \frac{\Gamma_e}{(\delta x)_e} - \frac{1}{2}(\rho u)_w + \frac{\Gamma_w}{(\delta x)_{wW}} =$$

$$a_E = -\frac{1}{2}(\rho u)_e + \frac{\Gamma_e}{(\delta x)_e}$$

$$a_W = \frac{1}{2}(\rho u)_w + \frac{\Gamma_w}{(\delta x)_{wW}}$$

$$\frac{1}{2}(\rho u)_e - (\rho u)_e + (\rho u)_e + \frac{\Gamma_e}{(\delta x)_e} - \frac{1}{2}(\rho u)_w + (\rho u)_w - (\rho u)_w + \frac{\Gamma_w}{(\delta x)_{wW}} =$$

$$-\frac{1}{2}(\rho u)_e + \frac{\Gamma_e}{(\delta x)_e} + \frac{1}{2}(\rho u)_w + \frac{\Gamma_w}{(\delta x)_{wW}} + [(\rho u)_e - (\rho u)_w] = a_E + a_W + [(\rho u)_e - (\rho u)_w]$$

$a_E$

$a_W$

Defining diffusion  
conductance(扩导):

$$D = \frac{\Gamma}{\delta x},$$

Interface flow rate:

$$F = \rho u$$

**The discretized form of 1-D steady diffusion and convection equation is:**

$$a_P \phi_P = a_E \phi_E + a_W \phi_W$$
$$a_E = D_e - \frac{1}{2} F_e \quad a_W = D_w + \frac{1}{2} F_w$$
$$a_P = a_E + a_W + \underline{(F_e - F_w)}$$

**If in the iterative process the mass conservation is satisfied then**

$$F_e - F_w = 0$$

**In order to guarantee (保证) the convergence of iterative process, it is required:**

$$a_P = a_E + a_W$$

### 3. Analysis of discretized diffu-conv. eq. by CD

From  $a_P \phi_P = a_E \phi_E + a_W \phi_W$  it can be obtained:

$$\phi_P = \frac{a_E \phi_E + a_W \phi_W}{a_E + a_W} = \frac{(D_e - \frac{1}{2} F_e) \phi_E + (D_w + \frac{1}{2} F_w) \phi_W}{(D_e - \frac{1}{2} F_e) + (D_w + \frac{1}{2} F_w)}$$

Uniform grid → Const property

$$\phi_P = \frac{(1 - \frac{1}{2} \frac{F}{D}) \phi_E + (1 + \frac{1}{2} \frac{F}{D}) \phi_W}{(D + D) / D} \longrightarrow \frac{(1 - \frac{1}{2} P_\Delta) \phi_E + (1 + \frac{1}{2} P_\Delta) \phi_W}{2}$$

$P_\Delta$  is the grid Peclet,  $P_\Delta = \frac{\rho u (\delta x)}{\Gamma}$

With the given  $\phi_E, \phi_W, \phi_P$  can be determined.

Given  $\phi_W = 100, \phi_E = 200$   
for  $P_\Delta = 0, 1, 2, 4$

the calculated results are  
shown as follows.

According to the  
analytical solution


$$\frac{\phi - \phi_0}{\phi_L - \phi_0} = \frac{\exp\left(\frac{\rho u L}{\Gamma} \frac{x}{L}\right) - 1}{\exp\left(\frac{\rho u L}{\Gamma}\right) - 1}$$

where

$$\frac{\rho u L}{\Gamma} = Pe$$

based on whole length  $Pe = 2P_\Delta$

$\phi$  should be larger than zero.

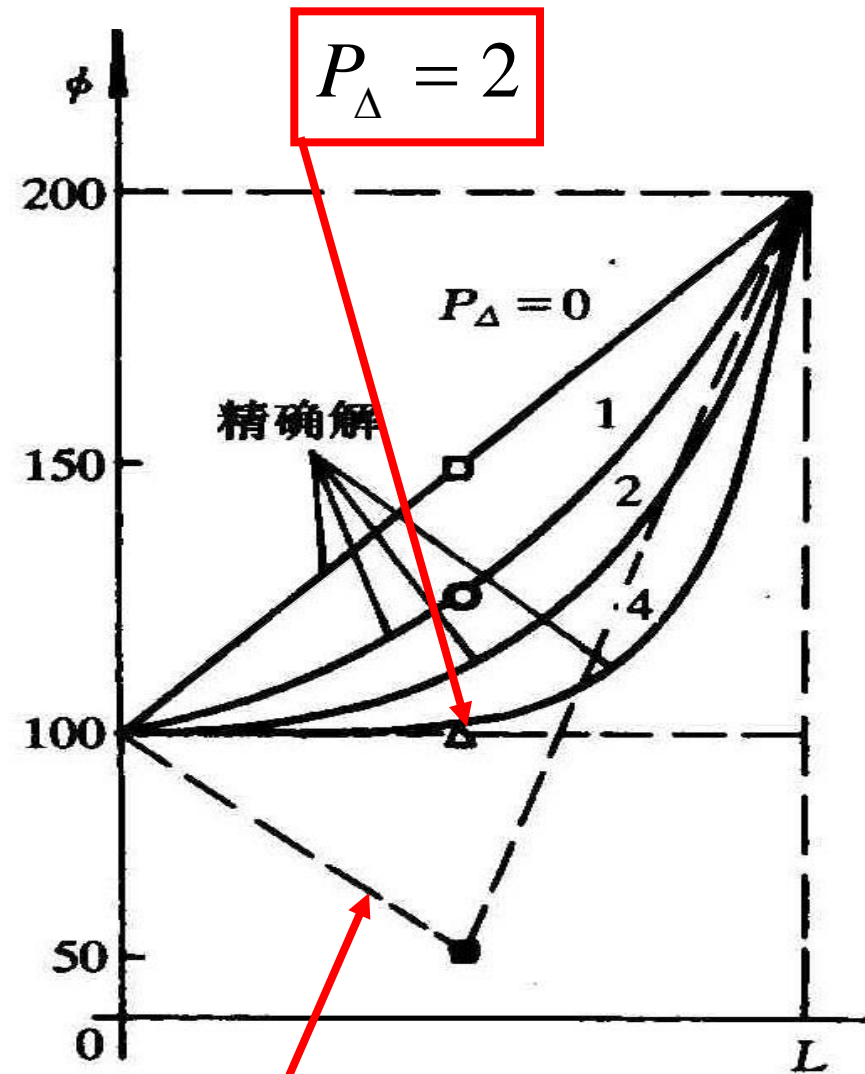


$P_\Delta = 4$

Thus when  $P_\Delta$  is larger than 2, numerical solutions are unrealistic:  $\phi_P$  is less than its two neighboring grid values, which is not possible for the case without source.

**The reason is**  $a_E = \frac{1}{2}(1 - \frac{1}{2}P_\Delta) < 0$ , i.e. the east influencing coefficient is negative, which is physically meaningless.

### 5.2.3 FUD of convection term

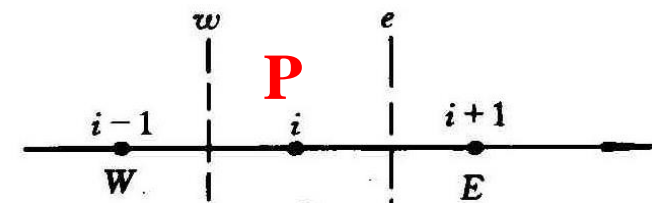

1. Definition in CV – interpolation of interface always takes upstream grid value

$$\phi_e = \begin{cases} \phi_P, u_e > 0 \\ \phi_E, u_e < 0 \end{cases} \quad \phi_w = \begin{cases} \phi_W, u_w > 0 \\ \phi_P, u_w < 0 \end{cases}$$

$O(\Delta x)$

## 2. Compact form(紧凑形式)

For the convenience of discussion, **combining interface value with flow rate**

$$(\rho u \phi)_e = F_e \phi_e = \phi_P \max(F_e, 0) - \phi_E \max(-F_e, 0)$$

Patankar proposed a special symbol as follows

**MAX:**  $\llbracket X, Y \rrbracket$  , then:

$$(\rho u \phi)_e = \phi_P \llbracket F_e, 0 \rrbracket - \phi_E \llbracket -F_e, 0 \rrbracket$$

Similarly:

$$(\rho u \phi)_w = \phi_W \llbracket F_w, 0 \rrbracket - \phi_P \llbracket -F_w, 0 \rrbracket$$

## 3. Discretized form of 1-D model equation with FUD for convection and CD for diffusion

$$a_P \phi_P = a_E \phi_E + a_W \phi_W$$

$$a_E = D_e + \|-F_e, 0\| \quad a_W = D_w + \|F_w, 0\|$$

$$a_P = a_E + a_W + (F_e - F_w)$$

Because  $a_E \geq 0, a_W \geq 0$  **FUD can always obtained physically plausible solution** (物理上看起来合理的解).

**FUD was widely used in the past decades since its proposal in 1950s.**

**However, because of its severe numerical errors (severe false diffusion, 严重的假扩散), it is not recommended for the final solution.**

# Chapter 5 Discretized diffusion—convection equation

**5.1 Two ways of discretization of convection term**

**5.2 CD and UD of the convection term**

**5.3 Hybrid and power-law schemes**

**5.4 Characteristics of five three-point schemes**

**5.5 Discussion on false diffusion**

**5.6 Methods for overcoming or alleviating effects of false diffusion**

**5.7 Stability analysis of discretized diffusion-convection equation**

**5.8 Discretization of multi-dimensional problem and B.C. treatment**

## 5.3 Hybrid and Power-Law Schemes

**5.3.1. Relationship between  $a_E, a_W$  of 3-point schemes**

**5.3.2. Hybrid scheme**

**5.3.3. Exponential scheme**

**5.3.4. Power-law scheme**

**5.3.5. Expressions of coefficients of five 3-point schemes and their plots**

## 5.3 Hybrid and Power-Law Schemes

### 5.3.1. Relationship between coefficients $a_E, a_W$ of 3-point schemes

- 3-point scheme** — interface interpolation is conducted by using two points at the two sides of the interface


With such scheme 1-D problem leads to tri-diagonal matrix, and 2-D penta-diagonal (五对角) matrix

- Relationship between  $a_E, a_W$**

East or West interfaces are relative to the grid position.

For the same interface shown by the red line:

it is East for point P,  
while West for E.

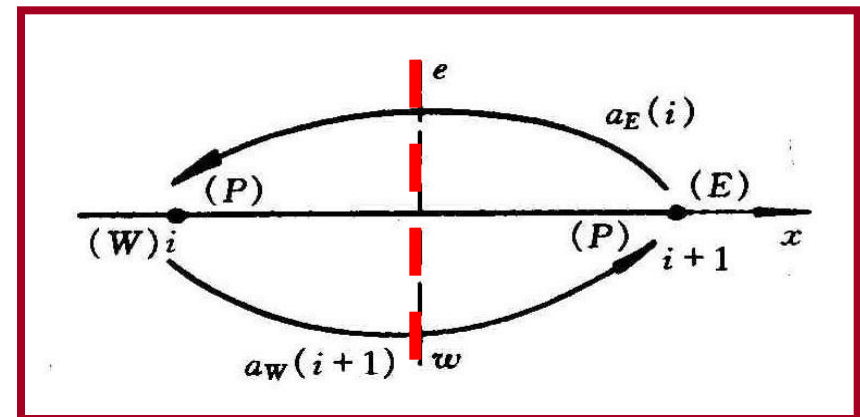

$a_E(i)$  and  $a_W(i+1)$  share the same interface, the same conductivity and the same absolute flow rate, hence they must have some interrelationship (内部关系).

For **CD**: 
$$a_E = D_e \left(1 - \frac{1}{2} P_{\Delta e}\right) \quad a_W = D_w \left(1 + \frac{1}{2} P_{\Delta w}\right)$$


At the same interface  $P_{\Delta e} = P_{\Delta w} = P_{\Delta} \quad D_e = D_w = D$

$$\frac{a_W(i+1)}{D} - \frac{a_E(i)}{D} = 1 + \frac{1}{2} P_{\Delta} - \left(1 - \frac{1}{2} P_{\Delta}\right) = P_{\Delta}$$

**Meaning**: for diffusion,  $a_E(i) = a_W(i+1)$

For convection if ( $u > 0$ ), node  $i$  has effect on  $(i+1)$ , while  $(i+1)$  has no effect on  $i$

Compared with  $a_E(i)$ ,  $a_W(i+1)$  has convection effect on grid  $i+1$

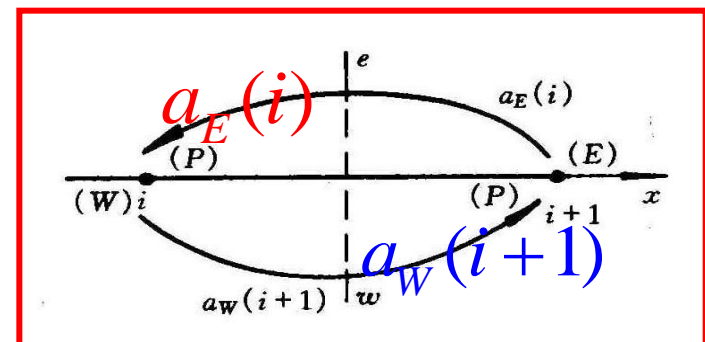

**FUD:**  $a_E = D_e (1 + \|-P_{\Delta e}, 0\|)$      $a_W = D_w (1 + \|P_{\Delta w}, 0\|)$

$$\frac{a_W(i+1)}{D} - \frac{a_E(i)}{D} = 1 + \|P_{\Delta}, 0\| - (1 + \|-P_{\Delta}, 0\|) \longrightarrow$$

$$\|P_{\Delta}, 0\| - \|-P_{\Delta}, 0\| = P_{\Delta}$$

For  $a_E$  or  $a_W$  once one of them is known, the other can be obtained.

Thus defining a scheme can be conducted by defining one coefficient. We will define the east coefficient.

## 5.3.2 Hybrid scheme(HBS, 混合格式)


### 1.Graph definition

Taking  $P_{\Delta}$  as abscissa ( 横坐标),  $\frac{a_E}{D_e}$  as ordinate( 纵坐标)

# Proposed by Spalding

- 1.  $|P_\Delta| > 2$ , neglecting diffu.
- 2. E is in upstream of P, convection has an effect

- 1.  $P_\Delta > 2$ , neglecting diffu.
- 2. E is in downstream of P, convection has no effect

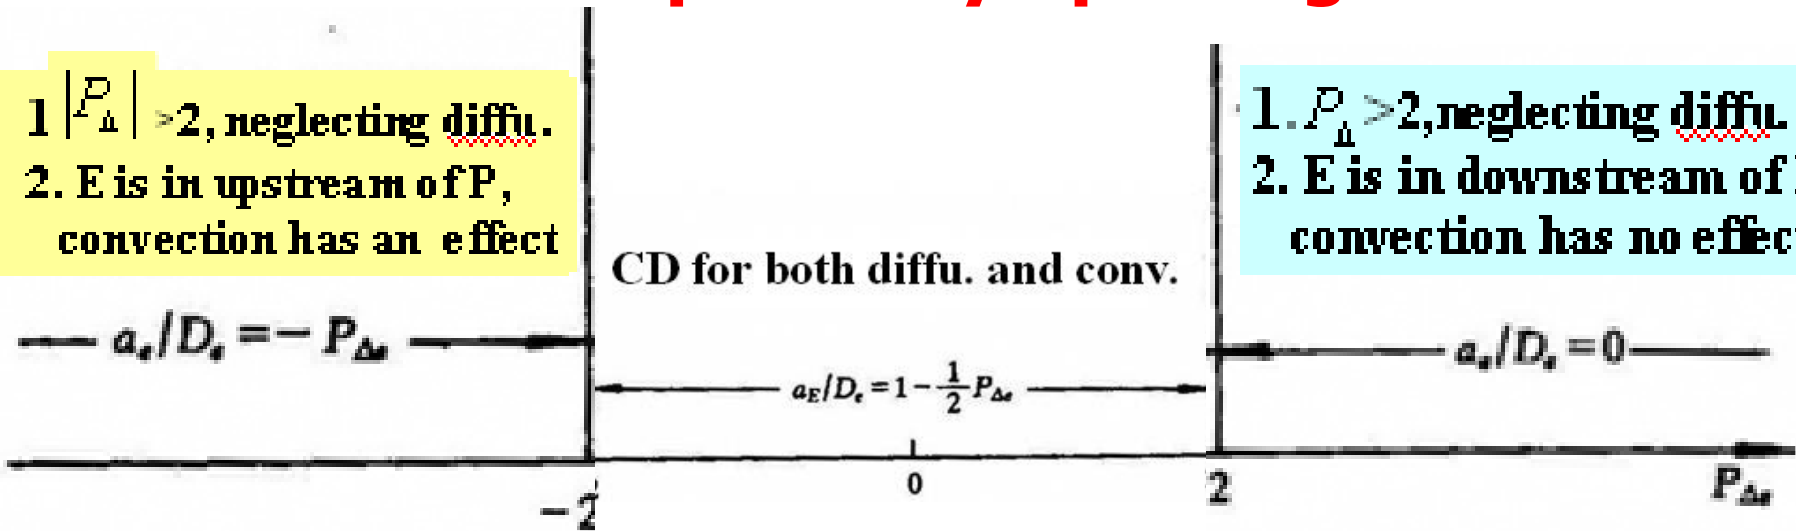

$$\frac{a_E}{D_e} = \begin{cases} 0, & P_\Delta > 2 \\ 1 - \frac{1}{2} P_\Delta, & |P_\Delta| \leq 2 \\ -P_\Delta, & P_\Delta < -2 \end{cases}$$

## 2. Compact definition

$$\frac{a_E}{D_e} = \left\| \left[ -P_{\Delta e}, 1 - \frac{1}{2} P_{\Delta e}, 0 \right] \right\|$$

### 5.3.3. Exponential scheme (指数格式)

**Definition:** the discretized form identical (恒等于) to the analytical solution of the 1-D model equation.

**Method:** rewriting the analytical solution in the algebraic equation of  $\phi$  at three neighboring grid points

#### 1. Total flux $J$ (总通量) of diffusion and convection

Define  $J = \rho u \phi - \Gamma \frac{d\phi}{dx}$ , then 1-D model eq. can be rewritten as  $\frac{dJ}{dx} = 0$ , or  $J = \text{const}$

For CV. P:  $J_e = J_w$

## 2. Analytical expression for total flux of diffu. and conv.

Substituting the analytical solution of  $\phi$  into  $J$  :

$$\phi = \phi_0 + (\phi_L - \phi_0) \frac{\exp(Pe \frac{x}{L}) - 1}{\exp(Pe) - 1}$$

$$Pe = \frac{\rho u L}{\Gamma}$$

$$J = \rho u \phi - \Gamma \frac{d\phi}{dx} = \rho u \left[ \phi_0 + (\phi_L - \phi_0) \frac{\exp(Pe \frac{x}{L}) - 1}{\exp(Pe) - 1} \right] - \Gamma \left[ (\phi_L - \phi_0) \frac{\frac{Pe}{L} \exp(Pe \frac{x}{L})}{\exp(Pe) - 1} \right]$$

$$\rho u \phi$$

$$\frac{\Gamma}{L} Pe = \frac{\Gamma}{L} \frac{\rho u L}{\Gamma} = \rho u$$

Hence:  $J = F \left[ \phi_0 + \frac{\phi_0 - \phi_L}{\exp(Pe) - 1} \right]$

$$F = \rho u$$

## 2. Expressions of total flux for e,w interfaces

**For e:**  $\phi_0 = \phi_P, \phi_L = \phi_E, L = (\delta x)_e : J_e = F_e \left[ \phi_P + \frac{\phi_P - \phi_E}{\exp(P_{\Delta e}) - 1} \right]$


**For w:**  $\phi_0 = \phi_W, \phi_L = \phi_P, L = (\delta x)_w : J_w = F_w \left[ \phi_W + \frac{\phi_W - \phi_P}{\exp(P_{\Delta w}) - 1} \right]$

Substituting the two expressions into  $J_e = J_w$ , and

rewrite into algebraic equation among  $\phi_W, \phi_P, \phi_E$

yields:  $a_P \phi_P = a_W \phi_W + a_E \phi_E$

$$a_E = \frac{F_e}{\exp(P_{\Delta e}) - 1} \quad a_W = \frac{F_w \exp(P_{\Delta w})}{\exp(P_{\Delta w}) - 1}$$

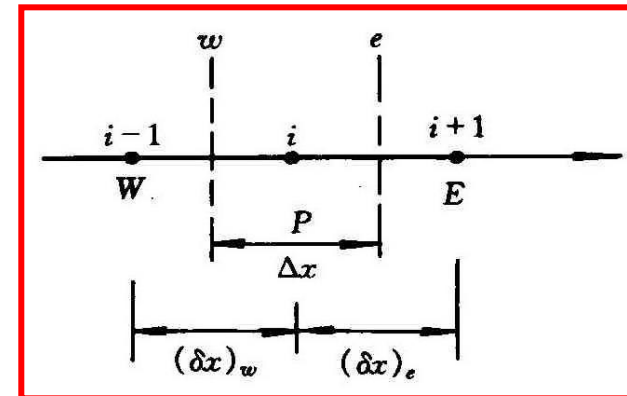

$$a_P = a_E + a_W + (F_e - F_w)$$

### 5.3.4. Power-law scheme (乘方格式)

Exponential scheme is computationally very expensive. Patankar proposed the power-law scheme, which is very close to the exponential scheme and computationally much cheaper:

$$a_E / D_e$$


- 1.  $P_\Delta > 0$ , no convection effect
- 2. Diffusion effect decreases to 0 when grid Peclet = 10

- 1.  $P_\Delta > 10$ , no diffusion effect
- 2. E is in the downstream of P, no convection effect

Compared with analytical solution, yielding  $n=5$

$$\frac{a_E}{D_e} = (1 - 0.1P_{\Delta e})^n$$

$$\frac{a_E}{D_e} = 0$$

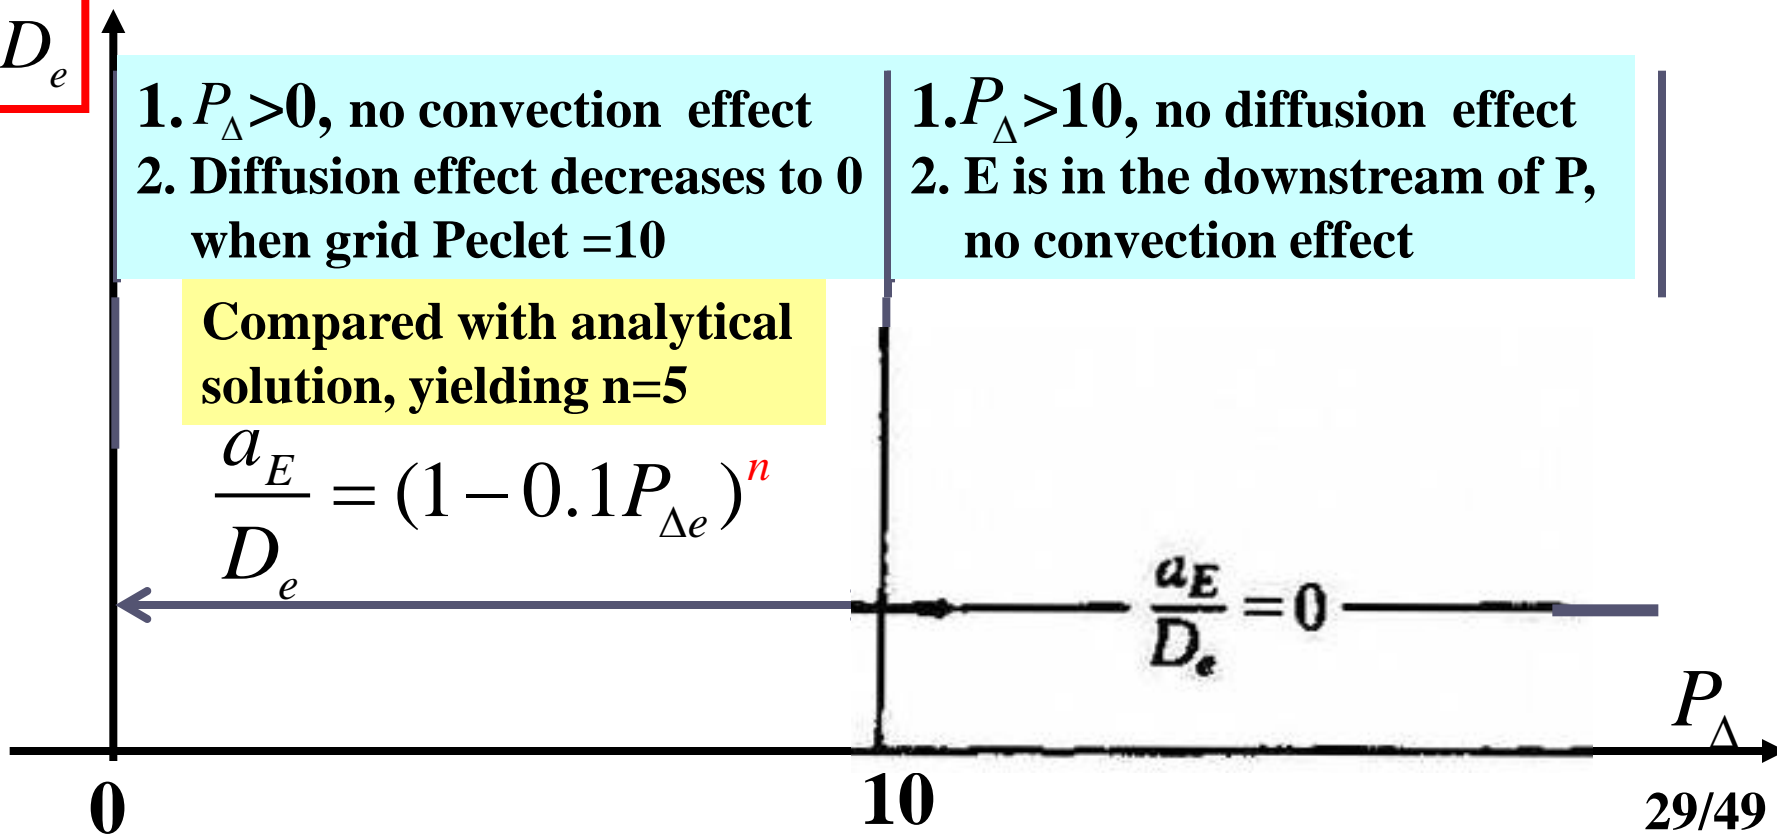

$$a_E / D_e$$

1.  $P_\Delta < 0$ , E is in the upstream of P, convection has effect
2.  $P_\Delta > 10$  diffusion has no effect

1.  $P_\Delta < 0$ , E is in the upstream of P, convection has effect
2.  $P_\Delta < 10$  diffusion has effect
3. Diffusion effect has the same expression as for  $P_\Delta > 0$

$$\frac{a_E}{D_e} = -P_\Delta$$

$$\frac{a_E}{D_e} = (1 + 0.1P_{\Delta e})^5 - P_{\Delta e}$$

-10

0

$P_\Delta$

## Compact form of the power-law scheme

$$\frac{a_E}{D_e} = \left\| 0, (1 - 0.1|P_{\Delta e}|)^5 \right\| + \left\| 0, -P_{\Delta e} \right\|$$


Diffusion effect

Convection effect

### 5.3.5. Coefficient expressions of five schemes and graph illustration ( $a_E / D_e$ )

Scheme	Central difference	Upwind difference
Definition	$1 - 0.5 P_{\Delta e}$	$1 + \left\  -P_{\Delta e}, 0 \right\ $
Hybrid	Power-law	Exponential
$\left\  -P_{\Delta e}, 1 - \frac{1}{2} P_{\Delta e}, 0 \right\ $	$\left\  0, (1 - 0.1 P_{\Delta e})^5 \right\  + \left\  0, -P_{\Delta e} \right\ $	$\frac{P_{\Delta e}}{\exp(P_{\Delta e}) - 1}$

$$a_E / D_e = 1 + \parallel -P_{\Delta e}, 0 \parallel$$

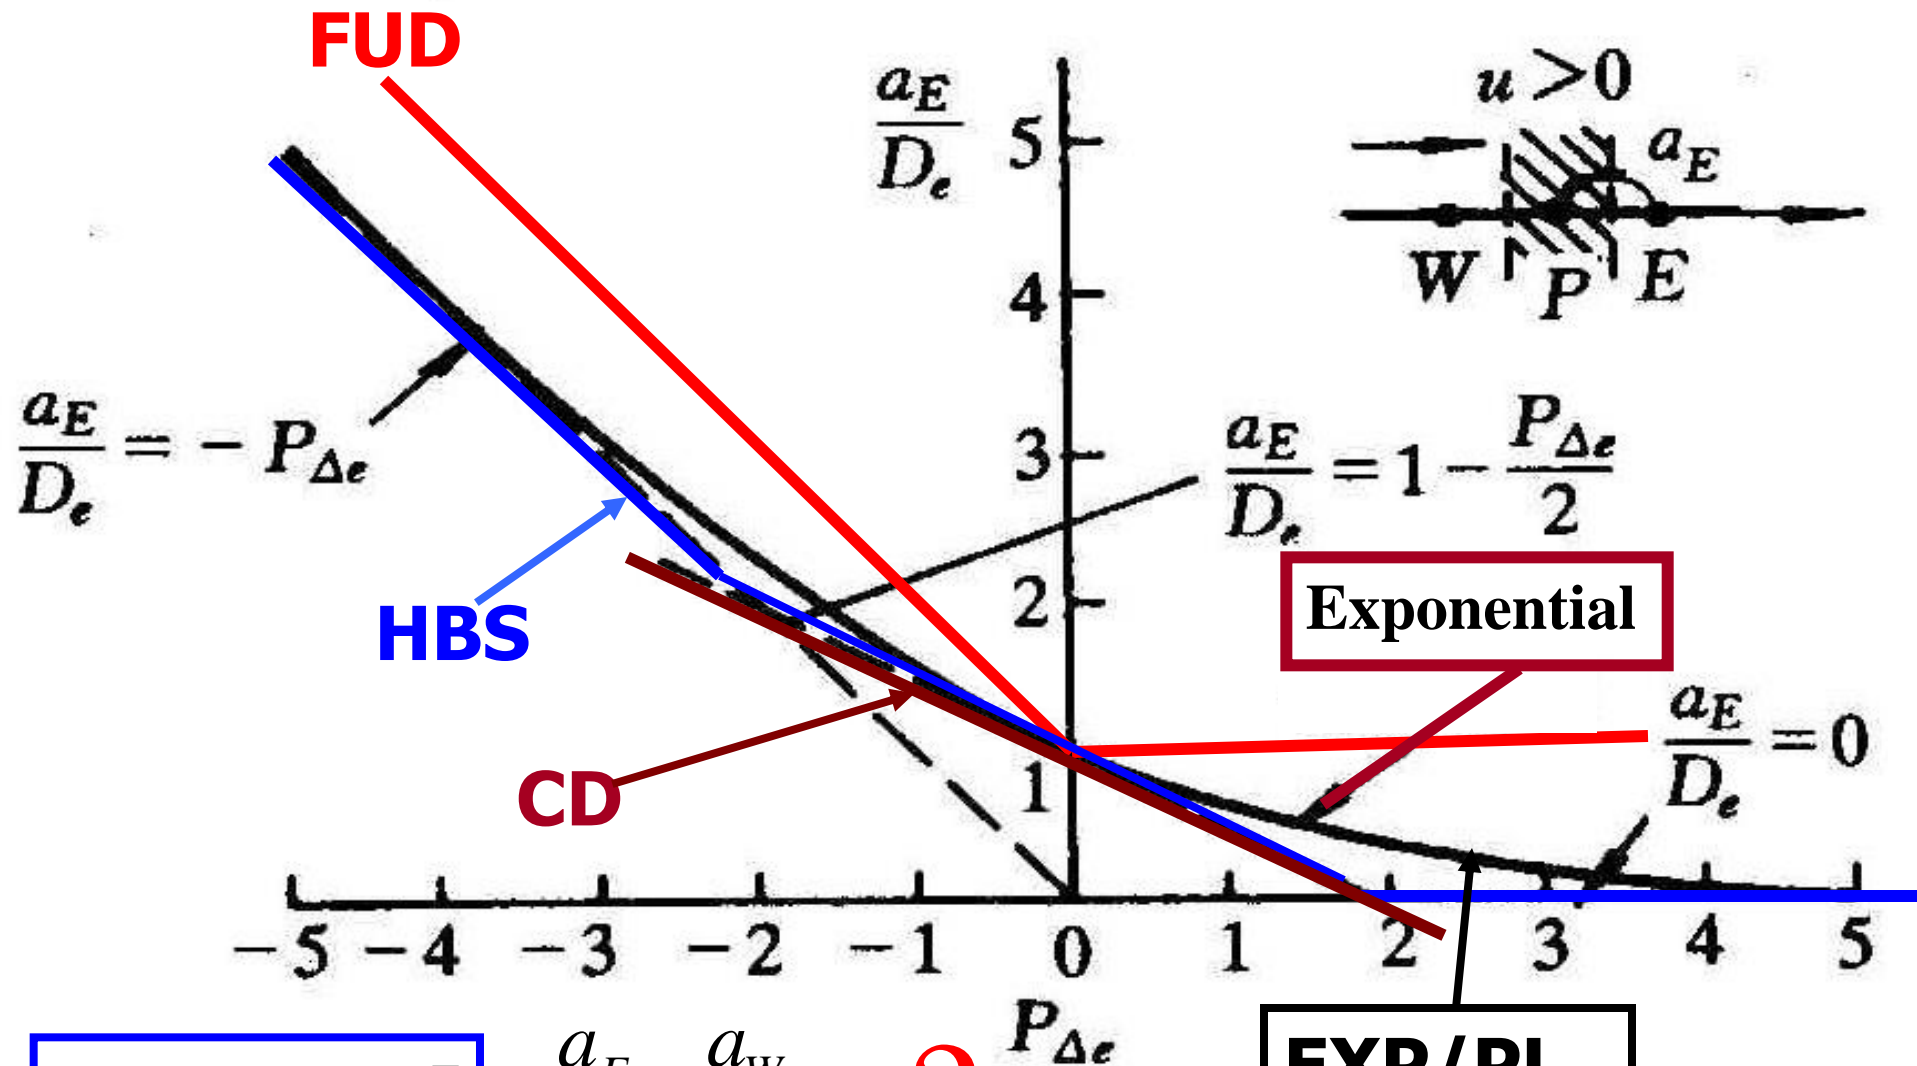

$$a_E, a_W \dots J$$

$$\frac{a_E}{D_E}, \frac{a_W}{D_W} \dots ?$$

EXP/PL

## 5.4 Characteristics of five three-point schemes

**5.4.1  $\mathcal{J}^*$  flux definition and its discretized form**

**5.4.2 Relationship between coefficients A and B**

**5.4.3 Important conclusions from coefficient characters**

**5.4.4 General expression for coefficients**

$$a_E, a_W$$

**5.4.5 Discussion**

## 5.4 Characteristics of five three-point schemes

### 5.4.1 $J^*$ flux definition and its discretized form

#### 1. $J^*$ definition (analytical expression)

$J$  flux is correspondent to the discretized equation

$a_P \phi_P = a_W \phi_W + a_E \phi_E$ , while flux correspondent to

coefficient  $a_E / D_e$  is called  $J^*$ , which is defined by:

$$J^* = \frac{J}{D} = \frac{1}{\Gamma / \delta x} \left( \rho u \phi - \Gamma \frac{d\phi}{dx} \right) = \left( \frac{\rho u \delta x}{\Gamma} \right) \phi - \frac{d\phi}{d\left(\frac{x}{\delta x}\right)} =$$

$$J^* = P_{\Delta} \phi - \frac{d\phi}{dX} \quad P_{\Delta} = \frac{\rho u \delta x}{\Gamma} \quad X = \frac{x}{\delta x}$$

## 2. Discretized form of $J^*$


For the three-point scheme  $J^*$  at interface can be expressed by a combination of variables at nearby (附近) two grids.

For interface  $(i+1/2)$ , let

$$J^* = B\phi_i - A\phi_{i+1}$$

**Ahead of (在...之前) the interface**

**Behind of (在...之后) the interface**

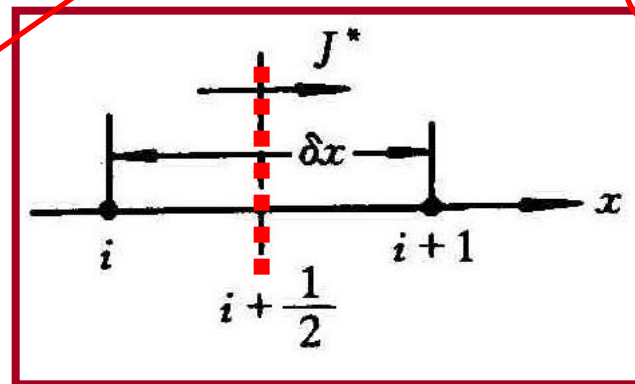

Viewed from positive direction of coordinate  
 Coefficients  $A$ ,  $B$  are dependent on grid Peclet,  $P_{\Delta}$

## 5.4.2 Analysis of relationship between $A$ and $B$

Analysis is based on fundamental physical and mathematical concepts.

### 1. Summation-subtraction character (和差特性)

For a uniform field, there is no diffusion at all.

Then  $J^*$  is totally caused by convection

From the analytical expression of  $J^*$ :

$$J^* = \left( P_{\Delta} \phi - \frac{d\phi}{dX} \right)_i = \left( P_{\Delta} \phi - \frac{d\phi}{dX} \right)_{i+1} = P_{\Delta} \phi_i = P_{\Delta} \phi_{i+1}$$

From the discretized expression of  $J^*$ :

$$J^* = B\phi_i - A\phi_{i+1}$$

**Analytical =  
Discretized!**

$$B\cancel{\phi}_i - A\cancel{\phi}_{i+1} = P_{\Delta}\cancel{\phi}_i = P_{\Delta}\cancel{\phi}_{i+1} \longrightarrow$$


$$B - A = P_{\Delta} \quad \text{Summation-subtraction(和差特性)}$$

## 2. Symmetry character


For **the same process** its mathematical formulation is expressed in two coordinates. The two coordinates are I , II , their positive directions are opposite (相反的) . Two points C,D are located at the two sides of an interface

**Viewed from coordinate positive direction**

**C-behind/D-ahead**

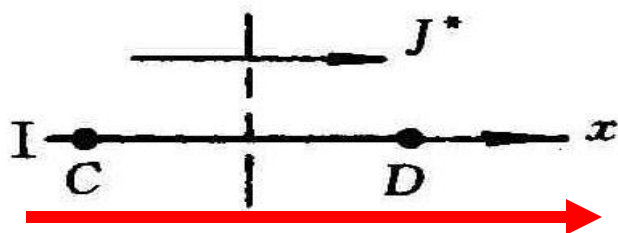


**C-ahead/D-behind**

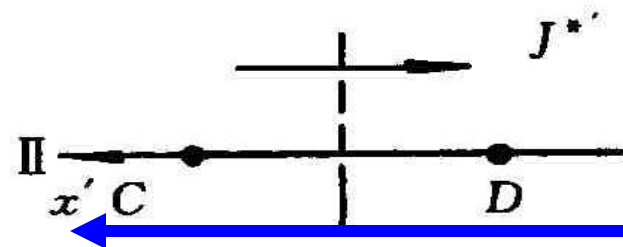


For the same flux, in coordinate I it is denoted by  $J^*$ , while in II denoted by  $J^{*}$ ' , then

For I **C-behind/D-ahead**

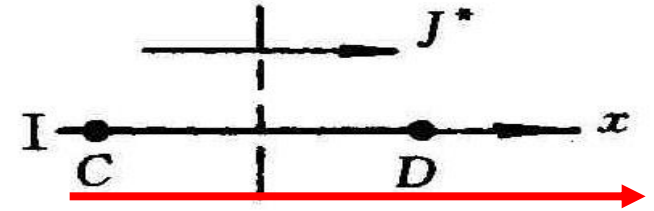

$$J^* = B(P_{\Delta})\phi_C - A(P_{\Delta})\phi_D$$

For II **D-behind/C-ahead**

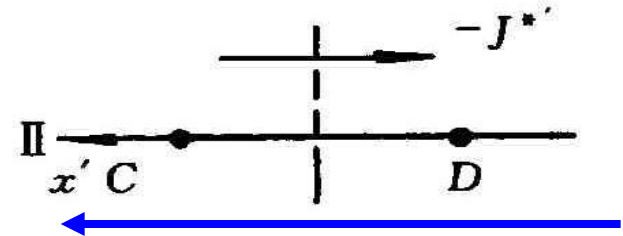

$$J^{*'} = B(-P_{\Delta})\phi_D - A(-P_{\Delta})\phi_C$$

The flux is the same, so:  $J^* = -J^{*}$ '

$$B(P_{\Delta})\phi_C - A(P_{\Delta})\phi_D = -[B(-P_{\Delta})\phi_D - A(-P_{\Delta})\phi_C]$$

**Merging (合并) the terms according to  $\phi_D, \phi_C$**

$$[B(P_{\Delta}) - A(-P_{\Delta})]\phi_C = [A(P_{\Delta}) - B(-P_{\Delta})]\phi_D$$

$\phi_D, \phi_C$  can take any values. In order that above eq.


is valid for any  $\phi_D, \phi_C$ , it is required:

$$B(P_{\Delta}) - A(-P_{\Delta}) = 0 \quad A(P_{\Delta}) - B(-P_{\Delta}) = 0$$

i.e.,:  $B(P_{\Delta}) = A(-P_{\Delta}); \quad A(P_{\Delta}) = B(-P_{\Delta})$

**Symmetry character(对称特性)**

Taking  $P_{\Delta} = 0$  as the symmetric axis, their plots are:

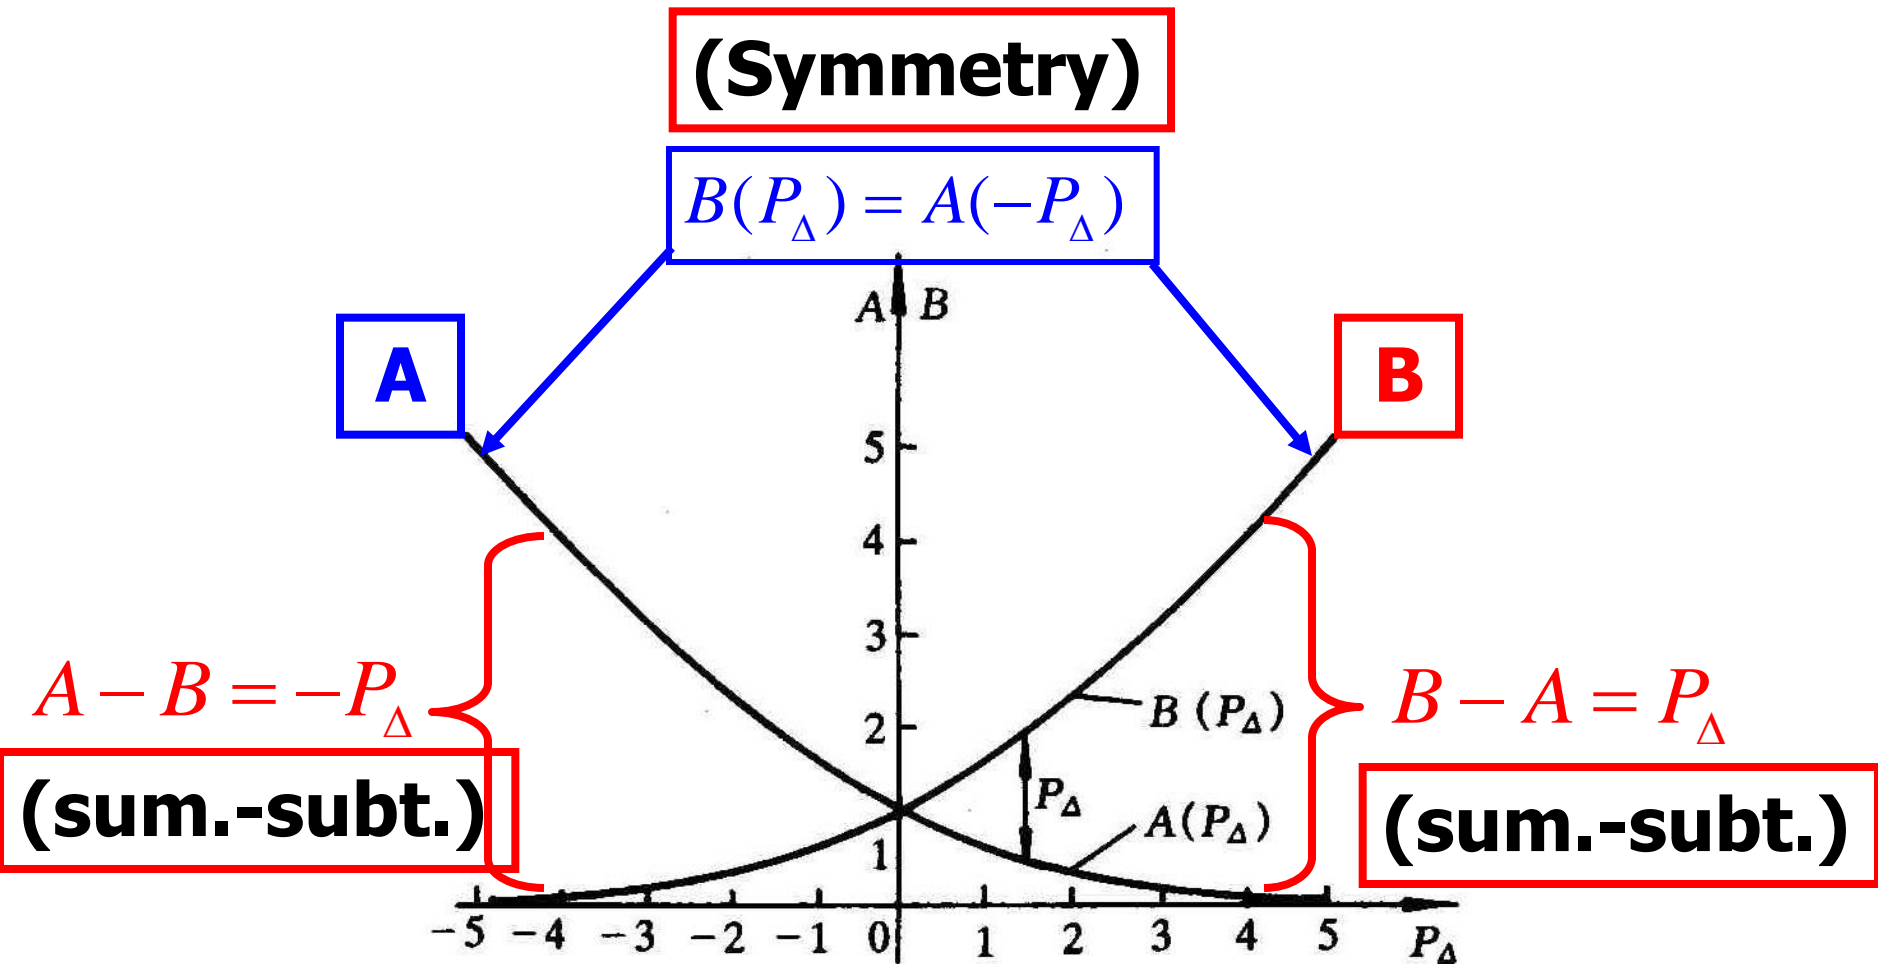

**These are basic features of  $A$  and  $B$  of the five 3-point schemes.**

## 5.4.3 Important conclusions from the two features

**For the five 3-point schemes if and only if the function of  $A(P_\Delta)$  is known for  $P_\Delta \geq 0$  then in the entire range of  $-|P_\Delta| \leq P_\Delta \leq |P_\Delta|$  the analytical expressions are known for both  $A(P_\Delta)$  and  $B(P_\Delta)$**

**[Proving] 1.** We show that this is **correct for  $A(P_\Delta)$**

**(1)** For case of  $P_\Delta \geq 0$   $A(|P_\Delta|)$  is given in the conditions.

**(2)** For case of  $P_\Delta < 0$  We have

$$\begin{array}{ccc}
 A(P_\Delta) & \xrightarrow{\text{Sum-sub}} & B(P_\Delta) - P_\Delta & \xrightarrow{\text{Symme}} & A(-P_\Delta) - P_\Delta \\
 & & & & \\
 & \xrightarrow{P_\Delta \leq 0} & & & A(|P_\Delta|) + |P_\Delta|
 \end{array}$$

Either  $P_\Delta > 0$  or  $P_\Delta < 0$

$$A(P) = \begin{cases} A(P_\Delta), & P \geq 0 \\ A(|P_\Delta|) + |P_\Delta|, & P_\Delta < 0 \end{cases} \left. \vphantom{A(P)} \right\} A(|P_\Delta|) + \|-P_\Delta, 0\|$$

2. Next we show that for  $B(P_\Delta)$  above statement is also valid

$$B(P_\Delta) \xrightarrow{\text{Sum.-subt.}} A(P_\Delta) + P_\Delta \xrightarrow{\text{From } \underline{A} (P) \text{ expression}}$$

$$A(|P_\Delta|) + \|-P_\Delta, 0\| + P_\Delta \longrightarrow A(|P_\Delta|) + \|P_\Delta, 0\|$$

Thus  $B(P_\Delta) = A(|P_\Delta|) + \|P_\Delta, 0\|$

**Finished!**

## 5.4.4 Derivation of general expression for $a_E, a_W$ from coefficient characters


**Basic idea** (1) For CV. P writing down diffu/convec. flux balance equation for its two interfaces;

(2) Introducing  $J = J^* D$ ; (3) Expressing  $J^*$  via  $A, B$ ;

(4) Expressing  $A, B$  via  $A(|P_\Delta|)$  Then general expressions of coefficients via  $A(|P_\Delta|)$  can be obtained.

$$J_e^* = B(P_{\Delta e})\phi_P - A(P_{\Delta e})\phi_E$$

$$J_w^* = B(P_{\Delta w})\phi_W - A(P_{\Delta w})\phi_P$$

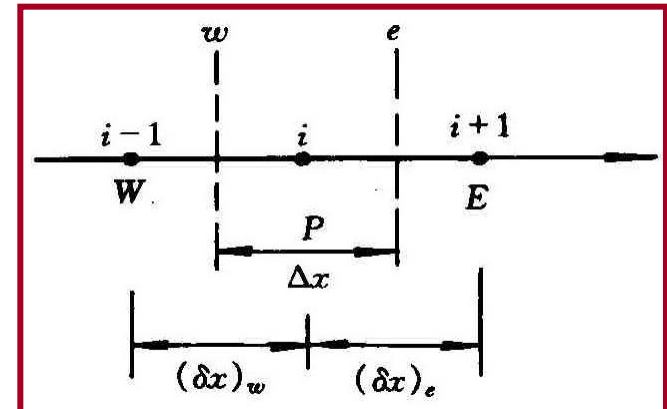

Substitute expressions of  $A(P), B(P)$  via  $A(|P_\Delta|)$  then algebraic equations among

$\phi_W, \phi_P, \phi_E$  can be obtained as follows:

$$a_P \phi_P = a_E \phi_E + a_W \phi_W$$

$$a_E = D_e A(|P_{\Delta e}|) + \|-F_e, 0\| \quad a_W = D_w A(|P_{\Delta w}|) + \|F_w, 0\|$$

$$a_P = D_e \underline{B(P_{\Delta e})} + D_w \underline{A(P_{\Delta w})} \text{ can be transformed as}$$

$$a_P = a_E + a_W + (\cancel{F_e} - F_w)$$

**General expressions of coefficients for five 3-point schemes**

$$a_E = D_e A(|P_{\Delta e}|) + \|-F_e, 0\|$$

$$a_W = D_w A(|P_{\Delta w}|) + \|F_w, 0\|$$

$$a_P = a_E + a_W + (\cancel{F_e} - F_w)$$

**See the appendix for the detailed derivation.**

## Expressions of $A(|P_\Delta|)$

Scheme	$A( P_\Delta )$
CD	$1 - 0.5  P_\Delta $
FUD	1
Hybrid	$[0, 1 - 0.5  P_\Delta ]$
Exponential	$ P_\Delta  / (\exp( P_\Delta ) - 1)$
Power-law	$[0, (1 - 0.1  P_\Delta )^5]$


## 5.4.5 Discussion

### 1. Extend from 1-D to multi-D:

For every coordinate constructing coefficients as shown above.

2. For the five 3-point schemes, by selecting  $A(|P_{\Delta}|)$  the scheme is set up.

3. Relationship between  $a_W(i+1), a_E(i)$  can be used to simplify computation

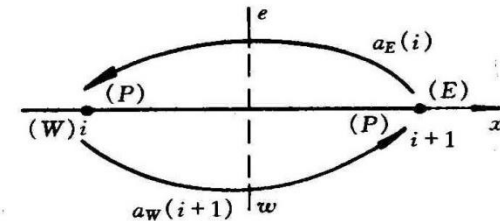

$$a_W(i+1) = \{D_w A(|P_{\Delta w}|) + \|F_w, 0\|\}_{i+1} \quad (D_w)_{i+1} = (D_e)_i$$

$$a_E(i) = \{D_e A(|P_{\Delta e}|) + \|-F_e, 0\|\}_i \quad (F_w)_{i+1} = (F_e)_i$$

$$\underline{a_W(i+1) - a_E(i) = \|F, 0\| - \|-F, 0\| = F} \quad (P_{\Delta w})_{i+1} = (P_{\Delta e})_i$$

## Appendix 1 of Section 5-4

$$J_e^* D_e = J_w^* D_w$$

$$D_e [B(P_{\Delta e}) \phi_P - A(P_{\Delta e}) \phi_E] = D_w [B(P_{\Delta w}) \phi_W - A(P_{\Delta w}) \phi_P]$$

$$\phi_P [D_e B(P_{\Delta e}) + D_w A(P_{\Delta w})] = [D_e A(P_{\Delta e})] \phi_E + [D_w B(P_{\Delta w})] \phi_W$$

$$a_P$$

$$a_E$$

$$a_W$$

**Expressing  $A$ ,  $B$  via  $A(|P_{\Delta}|)$**

$$A(P_{\Delta w}) = A(|P_{\Delta w}|) + \|-P_{\Delta w}, 0\| \quad B(P_{\Delta w}) = A(|P_{\Delta w}|) + \|P_{\Delta w}, 0\|$$

$$A(P_{\Delta e}) = A(|P_{\Delta e}|) + \|-P_{\Delta e}, 0\| \quad B(P_{\Delta e}) = A(|P_{\Delta e}|) + \|P_{\Delta e}, 0\|$$


$$a_E = D_e A(P_{\Delta e}) = D_e \{ A(|P_{\Delta e}|) + \|-P_{\Delta e}, 0\| \} \quad \longrightarrow$$

$$a_E = D_e A(|P_{\Delta e}|) + \|-F_e, 0\| \quad a_W = D_w A(|P_{\Delta w}|) + \|F_w, 0\|$$

$a_P = D_e B(P_{\Delta e}) + D_w A(P_{\Delta w})$  can be transformed as

$$D_e [A(|P_{\Delta e}|) + \|P_{\Delta e}, 0\|] + D_w [A(|P_{\Delta w}|) + \|-P_{\Delta w}, 0\|] =$$


$$D_e A(|P_{\Delta e}|) + \|F_e, 0\| + D_w A(|P_{\Delta w}|) + \|-F_w, 0\| =$$
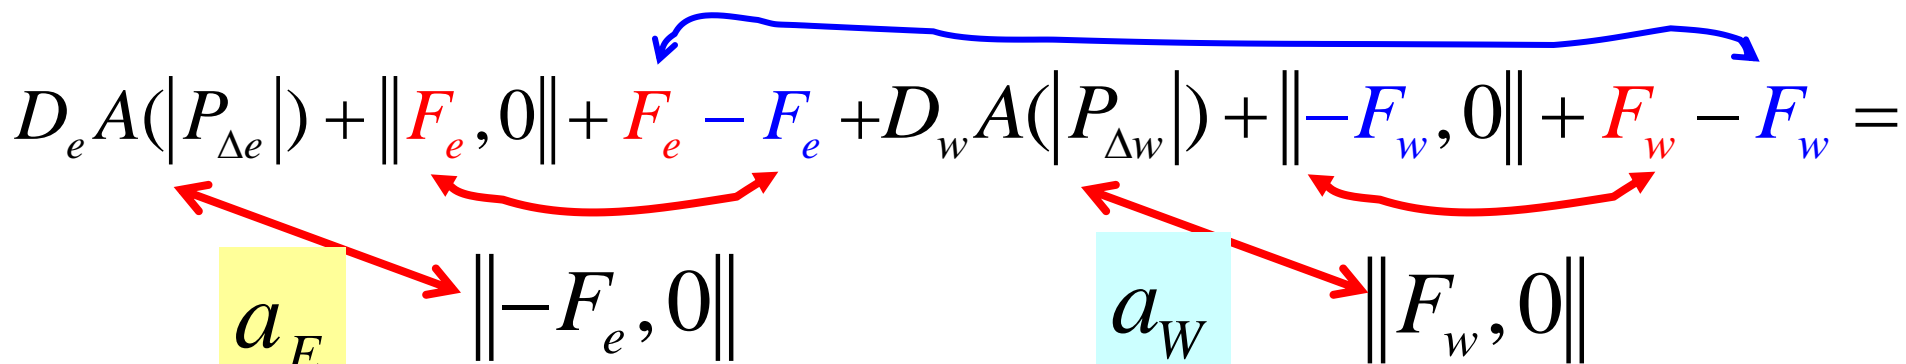
$$D_e A(|P_{\Delta e}|) + \|F_e, 0\| + F_e - F_e + D_w A(|P_{\Delta w}|) + \|-F_w, 0\| + F_w - F_w =$$


$a_E$ 
 $\|-F_e, 0\|$

$a_W$ 
 $\|F_w, 0\|$

$$a_P = a_E + a_W + (\cancel{F_e} - \cancel{F_w})$$

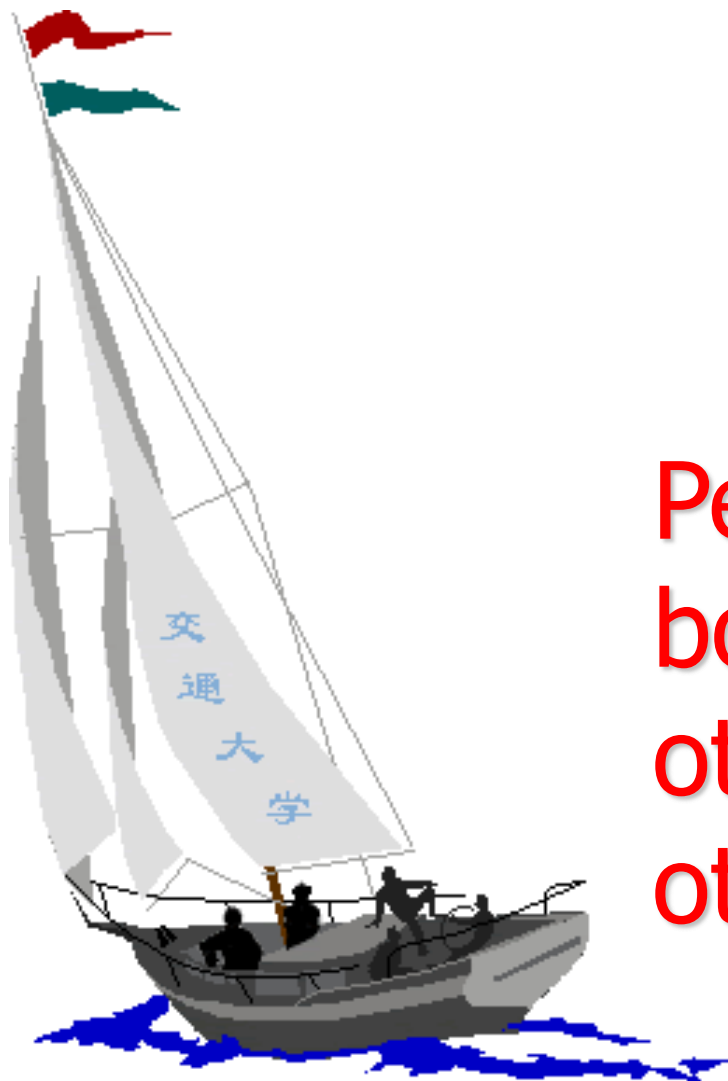

# 同舟共济 渡彼岸!

People in the same  
boat help each  
other to cross to the  
other bank, where....